

Elektrische Werte

Bemessungsstrom max. 10 A*
Durchgangswiderstand < 5 mOhm

Werkstoff

Kontakt Messing, vergoldet

Anschluss


Anschlussart/-bereich Crimp/ 0,14 - 1,0 mm²
- für Isolationscrimp max. $\varnothing 2,1$ mm
Abisolierlänge 6 mm
Crimpeinstellungen sind individuell zu wählen

Mechanische Werte

Steckzyklen 500

Werkzeuge (nicht im Lieferumfang enthalten)

digitale Crimpzange	TE Teile Nr.: C0-0235-000-P00 IC Ref. Nr.: C0.235.00
analoge Crimpzange für 1 mm und 2 mm Kontakte	TE Teile Nr.: C0-0201-000-P00 IC Ref. Nr.: C0.201.00
Positioniereinsatz für 1 mm Kontakte	TE Teile Nr.: C0-0003-000-000 IC Ref. Nr.: C0.003.00
Ausbauwerkzeug und Hülse für 1 mm Kontakte	TE Teile Nr.: C4-0005-000-000 + C4-0006-000-P00 IC Ref. Nr.: C4.005.00 + C4.006.00

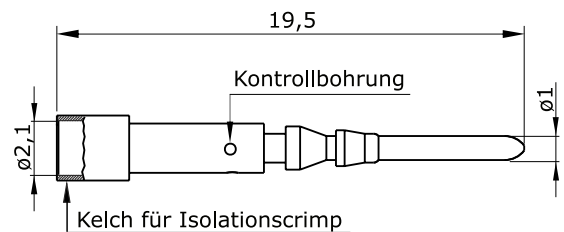

Hauptabmessungen

Kontaktstift





Contact Pin \varnothing 1 mm

for: - 923
- 932

TE part number: 61-0009-011-P00
IC reference number: 61.009.11

Electrical data

rated current max. 10 A*
contact resistance < 5 mOhm

Material

contact brass, gold plated

Termination

cross-section crimp/ 0.14 - 1.0 mm²
- for insulation crimp max. \varnothing 2.1 mm
stripping length 6 mm
crimp settings select individually

Mechanical Data

mating cycles 500


Tools (not part of product contents)

digital crimping tool TE part no.: C0-0235-000-P00
IC ref. no.: C0.235.00

analog crimping tool TE part no.: C0-0201-000-P00
for 1 mm and 2 mm contacts IC ref. no.: C0.201.00

positioner insert for 1 mm contacts TE part no.: C0-0003-000-000
IC ref. no.: C0.003.00

removing tool and sleeve TE part no.: C4-0005-000-000 + C4-0006-000-P00
for 1 mm contacts IC ref. no.: C4.005.00 + C4.006.00

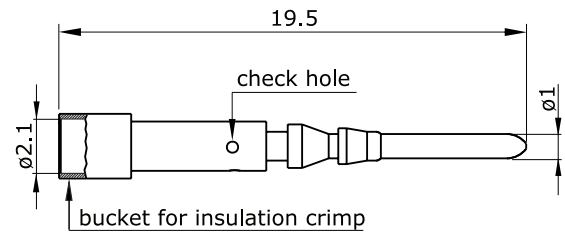

Main Dimensions
contact pin

Y6-B946-000-0EN issued: 31.03.2009/TP; modified: 17.10.2018/KC

© 2018 TE Connectivity

TE Connectivity, TE connectivity (logo), intercontec (logo) and speedtec are trademarks.

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this presentation, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this article are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

TE Connectivity Industrial GmbH
Bernrieder Straße 15
94559 Niederwinkling, Germany
+49 9962 2002 - 0
intercontec@te.com
www.intercontec.biz



* for max. wire cross-section