

## LUMAWISE POWER INPUT TERMINAL BLOCK

TE's LUMAWISE Power Input Terminal Block (TB) offers a unique, highly engineered wire termination alternative to traditional terminal blocks utilized in LED outdoor lighting luminaires and HID (High Intensity Discharge) luminaires that include HPS (High Pressure Sodium) and MHL (Metal Halide Lamps) that are rapidly transitioning to LED luminaires. TE's innovative design replaces power entry aluminum lug screw connections with rising vice clamp screw connections and quick connect tabs and receptacle wire connections with lever actuated spring cage clamp poke-in wire connections.

LUMAWISE TB provides 3 power input connections and multi-position signal connections inside of LED roadway, street and area luminaires. The terminal block rising vice clamp screw design accepts 6 - 14 AWG solid and stranded copper and aluminum input wires. The lever actuated poke-in wire spring clamp design accepts 12 - 18 AWG solid and stranded copper output wires. The LUMAWISE TB is designed with 2 side mounting hole slots to facilitate a drop in replacement of legacy terminal blocks.

### BENEFITS

- Simplifies input wire and multi-wire output connections
- Lever actuated spring clamp poke-in wire connections are more ergonomically operator friendly than quick connect tabs and receptacles
- Accepts ANSI compliant 6 - 14 AWG solid and stranded aluminum and copper input wires
- Accepts 12 - 18 AWG solid and stranded copper output wires
- Captive screw design in rising vice clamps prevent dislodged or lost screws

# LUMAWISE Power Input Terminal Block

## FEATURES

- Rising vice clamp screw power input connections
- Terminal captive screw in rising vice clamp connection
- Lever actuated spring clamp poke-in output connections
- Multi-wire lever actuated output connection remains in open position hands free
- Multi-wire lever must be actuated to closed position to secure poke-in wire connections

## APPLICATIONS

- Roadway, street and area lighting luminaires
- Commercial lighting (i.e. parking lots, car dealerships, etc)
- Decorative lighting luminaires
- Wallpack lighting fixtures
- Wall wash lighting fixtures

## MECHANICAL

- -40 to 105°C environmental rating
- **Input:** 3 positions accept 6 - 14 AWG solid and stranded aluminum and copper wires
- **Output:** Accepts up to three 12 - 18 AWG solid or stranded copper wires per input position

## PART NUMBER LIST

Part Number	Part Description
<a href="#">2382635-1</a>	LUMAWISE Power Input Block

## ELECTRICAL

- 15A, 480VAC

## MATERIALS


- **Housing, lever and cover:** PBT
- **Spring contact:** Stainless steel
- **Contacts:** Copper alloy, Tin plated
- **Screw:** Steel, Zinc plated

## STANDARDS

- **UL 1059:** Terminal Block
- ANSI C136.14 compliant

## SPECIFICATIONS

- **Product Spec:** 108-160129
- **Application Spec:** 114-160073

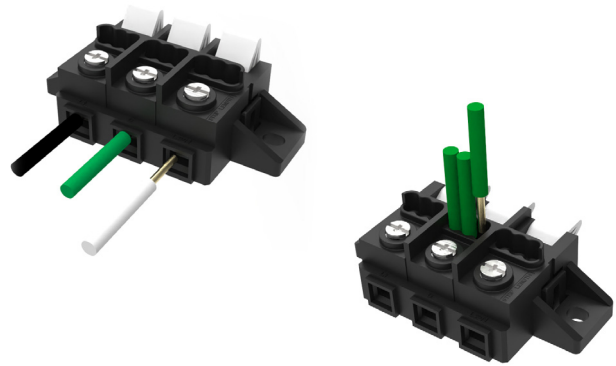

## te.com

© 2021 TE Connectivity. All Rights Reserved.

LUMAWISE, TE Connectivity, TE connectivity (logo) and Every Connection Counts are trademarks owned or licensed by TE Connectivity. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

09/21 AK