AMP J-002 DESIGN OBJECTIVES The product described in this document has not been fully tested to ensure conformance to the requirements outlined below. Therefore, AMP (Japan), Ltd makes no representation or warranty, express or implied, that the product 0.8-5307 will comply with these requirements. Further, AMP (Japan), Ltd. may change these requirements based on the results of additional testing and evalua-Contact AMP Engineering for further details In case when "product specification" is referred to in this document, it should be read as "design objectives" for all times as applicable. 108-5307 2.0 mm Dia. Ignition Plug Contact for Frame Sensor Device NUMBER 1. Scope: Customer Release 1.1 Contents: This specification covers the requirements for product performance and test methods of AMP 2.0 mm Dia. Ignition Plug Contact for frame Sensor device of the part number specified below. SECURITY CLASSIFICATION Part Number Descriptions Remarks 175135for #22 - #18 AWG Receptacle Contact 2. Materials: 2.1 Receptacle Contact: Pretinned Phosphor Bronze 3. Ratings: Voltage Rating: 200 V AC max. 3.1 Current Rating: 5 A max. 3.2 Temperature Rating: -20/+150°C (Temperature rising due to loaded current is included.) 3.3 3.4 Applicable Wire Range: Wire Size Contact Part No. Conductor mm² (AWG) Insulation Diameter (mm) 175135-0.3 - 0.89 (#22 - #18) 1.2 - 3.5SHEET 1 амр (Japan), Ltd. Kawasaki, Japan CHK. OF REV. roc LOC NO. 108-5307 Α 01 RFA-1905 DIST. Design Objectives NAME O1 Design Ubjectives 2.0 mm Dia. Ignition Plug RFA-1472

LTR

REVISION RECORD

CHK

Contact for Frame Sensor Device

4. Quality Assurance Provisions:

4.1 Test Conditions:

Unless otherwise specified, all the tests shall be performed under any combination of the following test conditions.

Temperarture

15-35 °C

Relative Humidity

45-75 %

Atmospheric Pressure

650-800 mmHg

4.2 Test Specimens:

The test specimens to be employed for the testing shall be selected from the normal production, conforming to the applicable drawing (s), and prepared in accordance with AMP Application Specification, 114-5130, using the wires of the sizes specified in Para. 3.4. The samples shall be not reused, unless otherwise specified.


5. Performance Requirements and Test Methods:

Para.	Test Items	Re	quirement	S	Procedures
5.1	Appearance	Product sha abnormaliti cracks, defo and burrs th to connector merchandis	ies such as a rmation, bl nat are detr functions	scratch, lister, dirt imental	Visual inspection.
5.2	Crimp Tensile Strength	Wire Size mm ² (AWG) 0.3 (#22) 0.5 (#20) 0.75 (#18)	Tensile Strength kg (min) 5		Apply an axial pull-off load to contact crimped on applicable wire (about 100 mm in length), at a rate of 100 mm a minute. Measure the force required to break wire or separates wire from crimp without insulation barrel
5.3	Contact insertion Contact Separating Forces	Ins. Force (kg) (max.)	12 Sep. Force		Apply force to contact with the use of tensile tester at a rate of 100 mm a minute, with ignition plug fixed. Measure the forces required to insert or separate contact.

SHEET	Æ	/ //	ЛF		AMP (Japan), Ltd. Kawasaki, Japan			
2 OF 7	roc	LOC A	NO.	108-5307	REV.			
NAME	D	T		in a Diama Cond	4			

2.0 mm Dia. Ignition Plug Contact for Frame Sensor Device

_	Para.	Test Items	Requirements	Procedures						
NUMBER: 108-5307	Temperature Rise		30 °C max.	Apply rated current to contact crimped on applicable range of wire, with it mated with plug. Take temperature reading on thermocouple attached to crimp, in stable condition reached. Temperature rise equals the above reading value minus room temperature.						
tomer ease										
SECURITY CUSTO CLASSIFICATION: CUSTO	5.5	Termination Resistance (Low Level)	100 m Ω max.	Subject contacts mated with plug to 50 mV open circuit at 100 mA maximum. Measure as indicated in Fig. 1. Calculate resistance values by subtracting resistance of wire (75 mm) and plug (55 mm) from the measured value.						
		Wire Contact Ignition Plug 75 mm Fig. 1								



Para.	Test Items	Requirements	Procedures
5.6	Vibration Sinusoidal Low Frequency	Termination Resistance, (low level): $150 \ m\Omega$ max.	Subject contacts mated with plug to the following conditions as specified in MIL-STD-202, Method 201 with them fixed on vibration tester as indicated in Fig.2: Frequency: 10-55-10 Hz traversed in 1 minute. Total excursion: 1.5 mm Duration: 2 hours in each of 3 mutually perpendicular axes (X,Y,and Z) Subject
ν ο σ υ - υ -		Securely fix pl Vibration Tab	
	Contact Wire		
5.7	Humidity Steady State	Termination Resistance (low level) : 150 m Ω max.	Subject mated samples to the following conditions as specified in MIL-STD-202, Method 103: Temperature: 40 °C Humidity: 90 to 95 % Duration: 96 hours Subject low level termination resistance test after the above test.

SHEET

AMP (Japan), Ltd. Kawasaki, Japan

4 OF 7

LOC J NO. 108-5307

NAME

2.0 mm Dia. Ignition Plug Contact for Frame Sensor Device

	Para.	Test Items	Requirements	Procedures
e NUMBER: 108—5307	Thermal Shock 5.8		Termination Resistance (low level): 150 mΩ max.	Subject mated samples to 25 cycles of the following test conditions as specified in MIL-STD-202, Method 107: Step of Temp Shift Exposure Condition 1 150 \pm $^{3}_{0}$ °C, 30 minutes 2 Room Temp. 5 minutes 3 $-20\pm$ $^{3}_{0}$ °C 30 minutes 4 Room Temp. 5 minutes
ECURITY Customer Cassification: Release	5.9	Salt Spray	Termination Resistance (low level): $15\ m\Omega$ max.	Subject mated samples to the following conditions as specified in MIL-STD-202, Method 101, Condition B: Salt concentration: 5% Temperature: 35°C Duration: 48 hours Measure termination resistance after samples cleaned in tap water and dried in the room temperature for 1 hour.
	5.10	Temperature Life	Termination Resistance (low level): $150~\text{m}\Omega$ max.	Subject mated samples to the following conditions as specified in MIL-STD-202, Method 108: Temperature: 150 °C Daration: 96 hours Measure termination resistance (low level) on samples after the above exposure test.

SHEET		//	/IF		AMP (Japan), Ltd. Kawasaki, Japan			
5 OF 7	LOC	LOC A	NO.	108-5307				
2.0 mm Dia. Ignition Plug Contact for Frame Sensor Device								

6. Product tests and Sequences:

Products tests and sequences, shall be performed in accordance with the following table:

Classification			Test Sequence							
Group Test Item	Para	I	П	Ш				IV		
Appearance	5.1	1	1	1						
Crimp Tensile Strength	5.2	2								
Contact Insertion Force	5.3		2							
Contact Separating Force	5.3		3							
Temperature Rise	5.4									1
Temperature Resistance Low level	5.5			2	4	6	8	10	12	
Vibration Low frequency	5.6			3						
Humidity	5.7				5					
Thermal Shock	5.8					7				
Salt Spray	5.9						9			
Temperature Life	5.10							11		

SHEET

AMP (Japan), Ltd. Kawasaki, Japan

6 OF 7

Loc J No. 108-5307

NAME

2.0 mm Dia. Ignition Plug Contact for Frame Sensor Device


108-5307

NUMBER

Customer Release

7. Mating Plug:


Mating plug to be used for product performance test shall have dimensions as indicated in Fig.3.

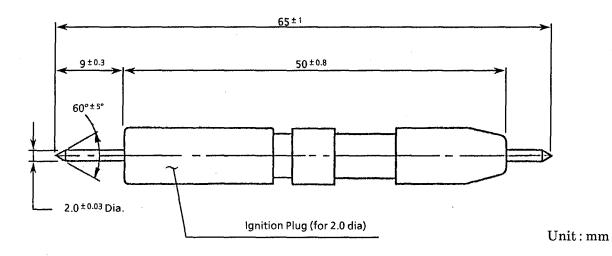

Note: 1. Material for plug shall be heat resistant alloy for high temperature. (YSS-YSTT)

Unplated Plug shall be used.

Fig. 3



2.0 mm Dia. Ignition Plug Contact for Frame Sensor Device