



S8658WPR S8658WPL

Circular Polarity Wide Band RFID Panel Antenna

865-960 MHz 8.5 DBIC CIRCULAR POLARITY PANEL

The Laird S8658WPR antenna is a circularly polarized panel antenna that provides reception and transmission of signals in the 865-960 MHz frequency band. Laird's industry renowned design methodology achieves maximum efficiency and performance across the entire frequency band.


Both VSWR and axial ratios are both excellent and allow the user to achieve the maximum performance for an antenna of this type. The antenna is housed in a heavy duty radome enclosure that can be directly wall mounted. An optional articulating mount allows either wall or mast mounting. The antenna is offered with an integrated coax pigtail and a variety of connector types are available.

FEATURES

- Low profile
- Extremely low VSWR and axial ratio
- Wide band
- Weather and UV resistant radome
- Wide range of connector and cable options
- Left hand and right hand CP versions

APPLICATIONS

- Warehouse
- Distribution center
- Airports and hospitals
- Transit terminals
- Conveyer belt

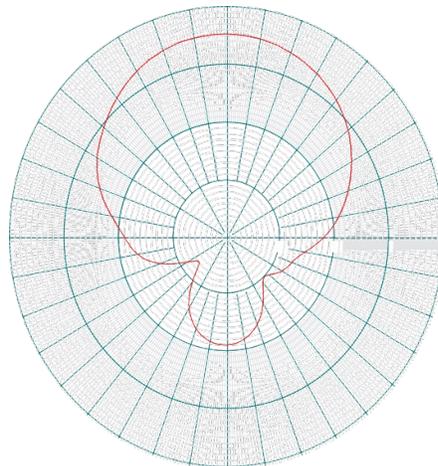

902 MHz

SPECIFICATIONS

Antenna Part Number	S8658WPR and S8658WPL
Frequency Range	865 - 960 MHz
Gain	8.5 dBic
Maxium VSWR	1.4:1
Max Linear Gain	6 dBiL
3 dB Beamwidth - Azimuth	65°
Front to Back Ratio	20 dB
Polarization	Circular Right-hand or circular Left-hand
Maxium Input Power	3 Watts
Input Impedence	50 Ohms
Axial Ratio	1dB
Weight (Kg)	2.5 lbs (1.13)
Mechanical Size (mm)	10.2" x 10.2" x 1.32" (259 x 259 x 34)
Antenna Connection	Coax Pigtail, Rev TNC Male (others available)
Radome	High Strength PC
Mount Style	Threaded Stud
Temperature Operational	-25°C to +70°C
Lightning Protection	DC Grounded
Environmental Rating	IP 54

te.com

TE, and TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2023 TE Connectivity. All Rights Reserved.

05/23 Original

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015