


Automotive Relays High Voltage Contactors


EVC 175 Main Contactor

- Limiting continuous current 175A at +85°C
- Suitable for voltage levels up to 500VDC
- High peak current carrying capability up to 5000A¹⁾
- IEC 60664 (2007) compliant

Typical applications

DC high voltage and high current applications, e.g. main contactors for larger hybrid electric vehicles (HEV), plug-in hybrids (PHEV) and full electric vehicles (BEV), battery charging systems.

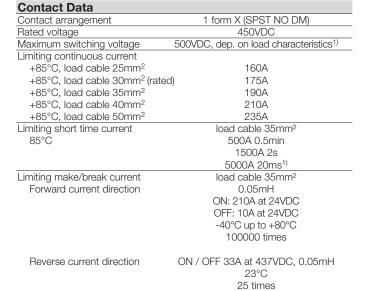



0 1 10 1	
Contact Data (continued)	
Limiting break current	load cable 35mm²
Forward current direction	500A at 450VDC, 0.05mH
	23°C
	10 times
	1500A at 450VDC, 0.05mH
	23°C
	1 time
Voltage drop (initial) at 100A	max. 40mV after 60s ²⁾
Voltage drop (over lifetime) at 175A	typ. 35mV ³⁾
Operate time ⁴⁾	20ms
Release time ⁴⁾	8ms
Mechanical endurance	>2x10 ⁵ ops. ⁵⁾

¹⁾ Please contact TE Connectivity for details.

²⁾ Measurement condition: 370A for 2s followed by 100A for 60s

³⁾ Max. 600mV with current >1A

⁴⁾ Measured at standard conditions (23°C/12V without supression elements)


⁵⁾ Preliminary data - not validated yet




Automotive Relays High Voltage Contactors

EVC 175 Main Contactor (Continued)

Coil operating range (coil 0001)



Coil operating range (coil 0002)



Insulation Data	
Initial dielectric strength	
between open contacts	2800VDC/3mA ¹⁴⁾
between contact and coil	2800VDC/3mA ¹⁴⁾
Insulation resistance after 1500A	abuse test
between open contacts	≥2MΩ ¹⁵⁾
between contact and coil	≥100MΩ ¹⁵⁾
Clearance/creepage	
IEC 60664-1 (2007)	over voltage cat. I ¹⁶⁾ pollution degree 3

5500m

Other Date	
Other Data	
Ambient temperature	-40°C to +85°C
Degree of protection	
IEC 61810 (2015-02)	RT I
Vibration resistance (functional) ¹⁷⁾	
ISO 16750-3 (2007)	30.8m/s2
wide-band random (profile IV)	No change of switching state >10µs
Shock resistance (functional) ¹⁷⁾	
ISO 16750-3 (2007)	ON: 6ms, min. 50g ¹⁸⁾ / 10 times
half sine	OFF: 6ms, min. 20g / 10 times
	No change of switching state >10µs.
Terminal type	connector (coil) and
	screw (load)
Weight	approx. 295g (10.4oz)
Packaging unit	36 pcs.

Altitude max.

Temperature monitoring of load terminals recommended. Avoid impact of strong external magnetic fields near the contactor.

Coil Data⁶⁾ (Coil 0001)

Un-economized:	single coil	version for	external	economization ^{7,8)}
OII COOIIOIIIIZCU.	Jiligic Coli	VCI SIOII IOI	CALCITICI	COOHOHHZUUOH

Coil	Rated	Must	Non-release	Coil	
code	voltage	Operate	voltage	resistance	
	[VDC]	voltage	[VDC]	$[\Omega]$	
		[VDC]		±10%	
0001	12	7.5	1.6	5.0	

Recommended parameters for external economization with PWM9,10)

Min.	Controlled current PWM		Controlled voltage equivalen	
frequency	Max. current	Min. current	Max. voltage	Min. voltage
[kHz]	[A RMS]	[A RMS]	[V RMS]	[V RMS]
20	0.77	0.4	5.9	3.0

Coil Data⁶⁾ (Coil 0002)

Economized: dual coil version with internal switch8)11)

Economicour addi con vorcion with internal evitor						
Coil	Rated	Must	Nominal inrush	Non-release	Max.	Coil
code	voltage	Operate	current	voltage	voltage	resistance
	[VDC]	voltage12)	[ADC]	[VDC]	[VDC]	[Ω]
		[VDC]				±10%
0002	12	7.5	4.0	4.0	16.0	3/33 ¹³⁾


- All values valid for 23°C ambient temperature with no pre-energization if not noted otherwise. Refer to diagram for values at other temperatures. Requires external coil economization that must start 100-300ms after coil activation. Avoid repetitive switching. Minimum clamp voltage 36V (see circuit recommendation). Valid for 0g
- 9) To ensure the specified number of switching cycles apply a minimum pull-in current of 2.4A for at least 100ms. Values include the specified shock and vibration resistance. Valid over ambient temperature range from -40°C to +85°C. 10) Valid for 50g
- 11)Max. duty cycle 0.5Hz
- 12)Max. rise time 100ms. To ensure the specified number of switching cycles apply a minimum coil voltage of 12V for at least 100ms. Values include the specified shock and vibration resistance. Valid over ambient temperature range from -40°C to +85°C.
- 13)3 Ω coil is switched off internally max. 130ms after pull-in. Demagnetization voltage is clamped at approx. 40V. No external coil suppression necessary. External coil suppression could reduce switching capability. Please contact TE Connectivity for
- 14)ISO/DIS 6469-3:2011 (page 12-13).
- 15) EN 61810-1:2004 table 8, functional and basic insulation.
- 16) Meets rated impulse voltage 2500V
- 17) Preliminary data for bottom mount version. Data not validated yet.
- 18) Higher values can be achieved with increased holding current applied.

EVC 175 Main Contactor (Continued)

Terminal Assignment

Forward load current direction

Circuit recommendation for coil 0001Always use low-side switch "Enable" for switch-off.




Un-economized coil Coil 0001

2 O


External coil suppression >36V

Economized coil internal circuit



Dimensions

EVC 175 Main Contactor Side Mount Version

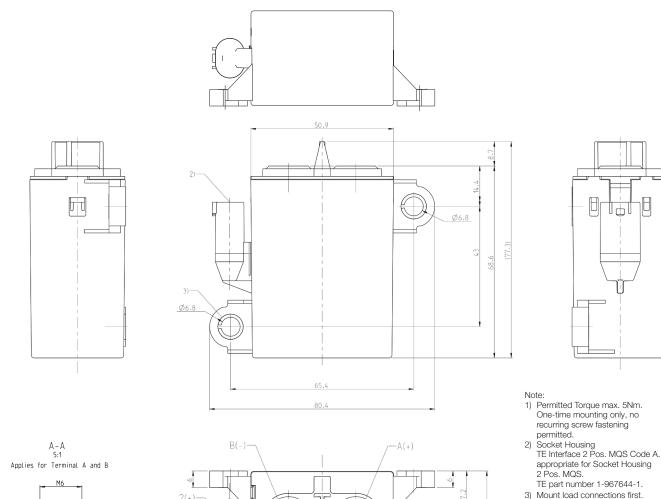

Consult TE Connectivity for detailed


mounting instructions. Tolerances ISO8015 / ISO2768-cL.





EVC 175 Main Contactor (Continued)


Dimensions


EVC 175 Main Contactor Bottom Mount Version






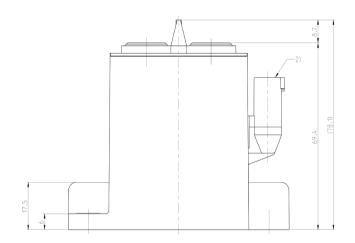







Note:

- 1) Permitted Torque max. 5Nm.
 One-time mounting only, no recurring screw fastening permitted.
- permitted.


 2) Socket Housing
 TE Interface 2 Pos. MQS Code A.
 appropriate for Socket Housing
 2 Pos. MQS.
 TE part number 1-967644-1.
- Mount load connections first.
 Consult TE Connectivity for detailed mounting instructions.

Tolerances ISO8015 / ISO2768-cL.



Automotive Relays High Voltage Contactors

EVC 175 Main Contactor (Continued)

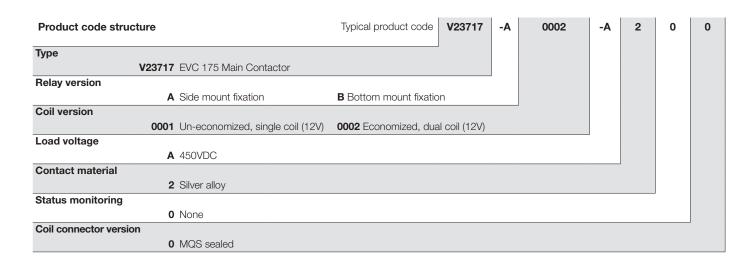

Production in Europe (only)

Product code	Relay version	Coil suppr.	Circuit	Part number
V23717-A0001-A200	Side mount fixation	External >36V	External economizer	6-1904123-6
V23717-A0002-A200		Internal	Internal economizer	2-1904070-1
V23717-B0001-A200	Bottom mount fixation	External >36V	External economizer	5-1904144-3
V23717-B0002-A200		Internal	Internal economizer	8-1904133-1

Consult TE Connectivity for sample availability.

Production in Asia (only)

Product code	Relay version	Coil suppr.	Circuit	Part number
V23717-A0001-A200	Side mount fixation	External >36V	External economizer	2312311-2
V23717-A0002-A200		Internal	Internal economizer	2312311-1
V23717-B0001-A200	Bottom mount fixation	External >36V	External economizer	2312311-4
V23717-B0002-A200		Internal	Internal economizer	2312311-3

Consult TE Connectivity for sample availability.