



LIGHT-N-LOK CONNECTORS

Hot Pluggable

TE connectivity's (TE) 2 and 3 position LIGHT-N-LOK hot pluggable connectors are poke-in wire-to-wire connectors. These provide a reliable, pluggable disconnect for hot and neutral ballast wiring that meets the National Electrical Code and Canadian Electrical Code requirements for new installations and retrofit non-residential fluorescent luminaire applications. The mated pair connector assembly accepts 18 AWG solid wire only with integral wire strain relief features that provide additional wire retention. Unmated and unmarked connectors are available for non NEC (National Electrical Code) or CEC (Canadian Electrical Code) lighting applications.

BENEFITS

- Available in 2 and 3 position sizes (required for dimmable lighting fixtures)
- Can be supplied as pre-assembled mated connector sets with or without factory installed flying leads
- Meets new NEC and CEC requirements for hot pluggable ballast disconnect
- Poke-in termination for 18 AWG (0.75 mm²) solid wire for easy tool-less, field or factory installation
- Integral strain relief prevents inadvertent wire twist out and pull out
- Designed to be hot pluggable
- Snag resistant rounded housings
- Compact polarized connector housings: 2 position assembly fits through a 5/8" diameter knock-out opening; 3 position assembly fits through 7/8" diameter knock-out opening
- Squeeze-to-release connector latches helps prevent unintentional disconnect of connector
- Product is marked (English/French) in support of CSA Luminaire Labeling Requirements

ELECTRICAL

- Contact Current Rating: 5A max
- Operating Voltage: 120 to 600 VAC
- Operating Temperature: -40°C to 95°C

MECHANICAL

- Wire Retention:
Strain relief retention exceeds 25 pounds (11,3 kg)

SPECIFICATIONS

- UL listed under ZMNA, E308110
- CSA certified under LR7189, Class 6233-01
- Product Specification: [108-2275](#)
- Application Specification: [114-13204](#) (2 position)
[114-13207](#) (3 position)
- Instruction Sheet: [408-10153](#) (2 position)
(3 position)

MATERIALS

- Contacts: Tin plated copper alloy
- Housing: Thermoplastic UL 94V-0
- RoHS Compliant

APPLICATIONS

- Commercial lighting applications for UL2459
- Hot pluggable interconnect for fluorescent ballast applications
- Indoor non-residential fluorescent fixtures
- Fluorescent LED retrofit fixtures
- Indoor LED lighting fixtures

LEARN MORE

- [View Products](#)
- [Landing Page](#)


Product Selection Information

Part Number	Description	Color
2008144-1	2 Position Mated Pair Assembly	Natural
2008910-1	2 Position Mated Pair Assembly	Orange
2008141-1	2 Position Plug Assembly	Natural
2008141-2	2 Position Plug Assembly-Unmarked	Natural
2008142-1	2 Position Receptacle Assembly	Natural
2008142-2	2 Position Receptacle Assembly-Unmarked	Natural
2008152-1	3 Position Mated Pair Assembly	Natural
2008152-2	3 Position Mated Pair Assembly	Orange
2008149-1	3 Position Plug Assembly	Natural
2008149-4	3 Position Plug Assembly-Unmarked	Natural
2008150-1	3 Position Receptacle Assembly	Natural
2008150-4	3 Position Receptacle Assembly Unmarked	Natural


LIGHT-N-LOK CONNECTORS - HOT PLUGGABLE

DIMENSIONS


Plug Assembly PN 2008141-1 (2 Pos. shown, 3 Pos. PN 2008149-1)

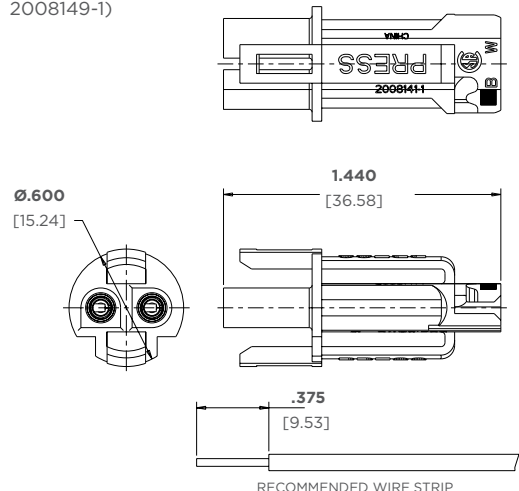

Mated Pair Assembly PN 2008141-1 (2 Pos. shown, 3 Pos. PN 2008149-1)

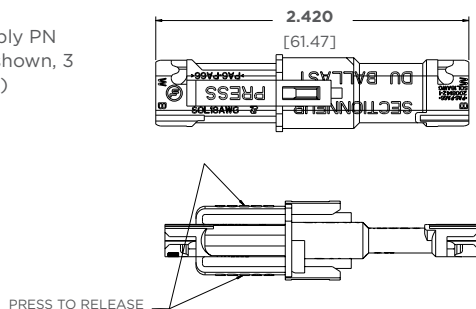

Receptacle Assembly PN 2008142-1 (2 Pos. shown, 3 Pos. PN 2008150-1)

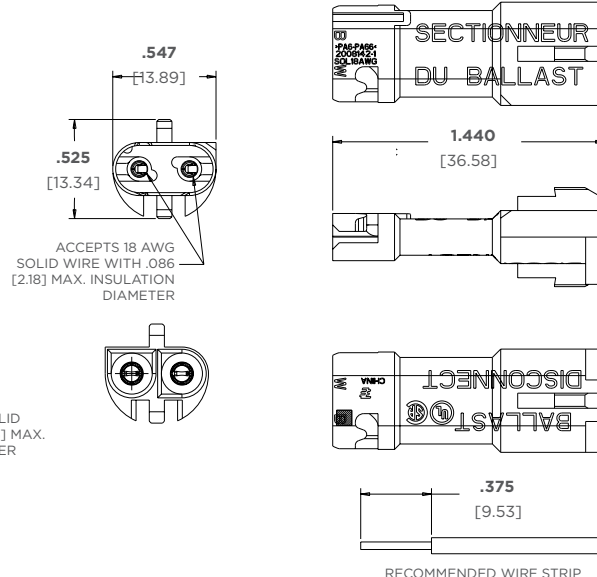

Connect With Us

We make it easy to connect with our experts and are ready to provide all the support you need.

Visit te.com/support to chat with a Product Information Specialist.

te.com/light-n-lok

LIGHT-N-LOK, TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

©2025 TE Connectivity. All Rights Reserved.

05-25