


TYCO ELECTRONICS RESERVES THE RIGHT TO AMEND THIS DRAWING AT ANY TIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
B	REVISE PER DCR# C060205	April/18/06	M.HIGGY
C	REVISE PER DCR# C060280	JUNE/6/06	M.HIGGY
E	REVISION D IS SKIPPED TO MATCH P.D. REV. PER ECO-11-025362	Dec/19/2011	M.HIGGY

If this document is printed it becomes uncontrolled. Check for the latest revision

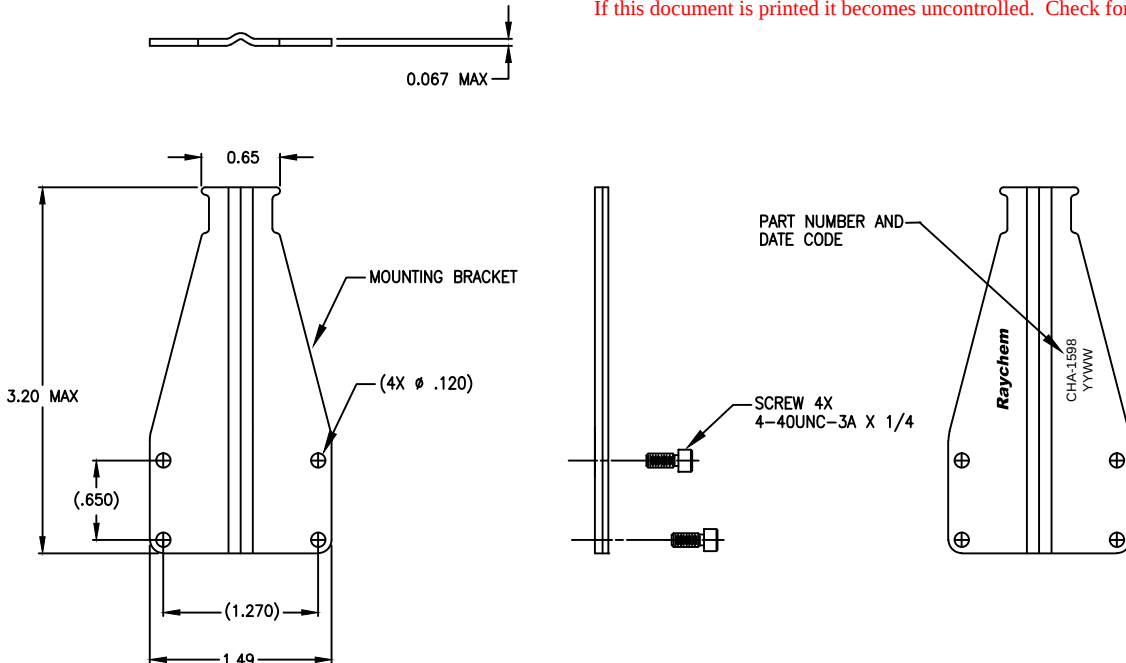

NOTE:

- THIS CABLE BRACKET IS DESIGNED FOR USE ON TYCO/RAYCHEM CONNECTOR HOUSINGS MTCTQ-YH1-X22. (SEE SHELL SPECIFICATION CONTROL DRAWINGS FOR FURTHER DETAILS).
- MATERIAL:

CABLE BRACKET	ALUMINUM ALLOY 5052-H32 PER SAE AMS-QQ-A-250
SCREWS (4)	SOCKET HEAD CAP SCREWS, CRES ALLOY A-286 PER SAE AMS 5737, PATCH LOCKING ELEMENT PER MIL-DTL-18240F, TYPE P
- FINISH:

CABLE BRACKET	ELECTROLESS NICKEL PER SAE-AMS-2404, CLASS 1
SCREWS:	PASSIVATION PER SAE-AMS-2700B TYPE II, METHOD I
- PART NUMBER, RAYCHEM AND DATE CODE ARE MARKED APPROXIMATELY AS SHOWN.

©2006–2011 Tyco Electronics. All rights reserved.

Raychem MTC
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES.
METRIC DIMENSIONS ARE
IN BRACKETS.


DECIMALS

.XXX ± 0.005 [0.13 mm]
.XX ± 0.01 [0.25 mm]
.X ± 0.1 [0.50 mm]

ANGLES

.X ± 0.5 DEG

DRAWN	T RATZLAFF	13MAR2006
CHECKED	ZS.DRBAN	12/April/06
APPROVED	M.HIGGY	12/April/06
REVISED		
CAD NAME: CHA-1598		
THIRD ANGLE PROJECTION		



TITLE

CABLE BRACKET ASSEMBLY
FIBER OPTIC TERMINI APPLICATION
MTCT-SERIES

SIZE	CAGE CODE:	DWG. NO.	REV:
A	06090	CHA-1598	E
SCALE: NONE			

SHEET 1 OF 1