

NOTES:

1. MATERIAL:

- | | |
|--------------------|--|
| A) BACKSHELL | COPPER ALLOY 172 PER QQ-A-533 |
| B) BACKSHELL SCREW | STAINLESS STEEL PER QQ-S-763, 300 SERIES |
| C) CLAMP BAR | STAINLESS STEEL PER QQ-S-763, 300 SERIES |
| D) INSERT | ALUMINUM ALLOY PER QQ-A-356 |
| E) CLAMP SCREW | STAINLESS STEEL PER QQ-S-763, 300 SERIES |
| F) BRAID | COPPER ALLOY |


0.285 MAX.
[7.24]

2. FINISH:

- | | |
|--------------------|-----------------------------|
| A) BACKSHELL | CADMIUM PLATED PER QQ-P-416 |
| B) BACKSHELL SCREW | CADMIUM PLATED PER QQ-P-416 |
| C) CLAMP BAR | CADMIUM PLATED PER QQ-P-416 |
| D) INSERT | CADMIUM PLATED PER QQ-P-416 |
| E) CLAMP SCREW | CADMIUM PLATED PER QQ-P-416 |
| F) BRAID | TIN PLATED |

3. RAYCHEM PART NUMBER CHA-0189 AND DATE CODE ARE STAMPED APPROXIMATELY AS SHOWN.

4. WHEN A BUS IS REQUIRED FOR TERMINATING SHIELDS, REFER TO RAYCHEM SPECIFICATION CONTROL DRAWING CTA-0158 FOR BUS DETAILS.

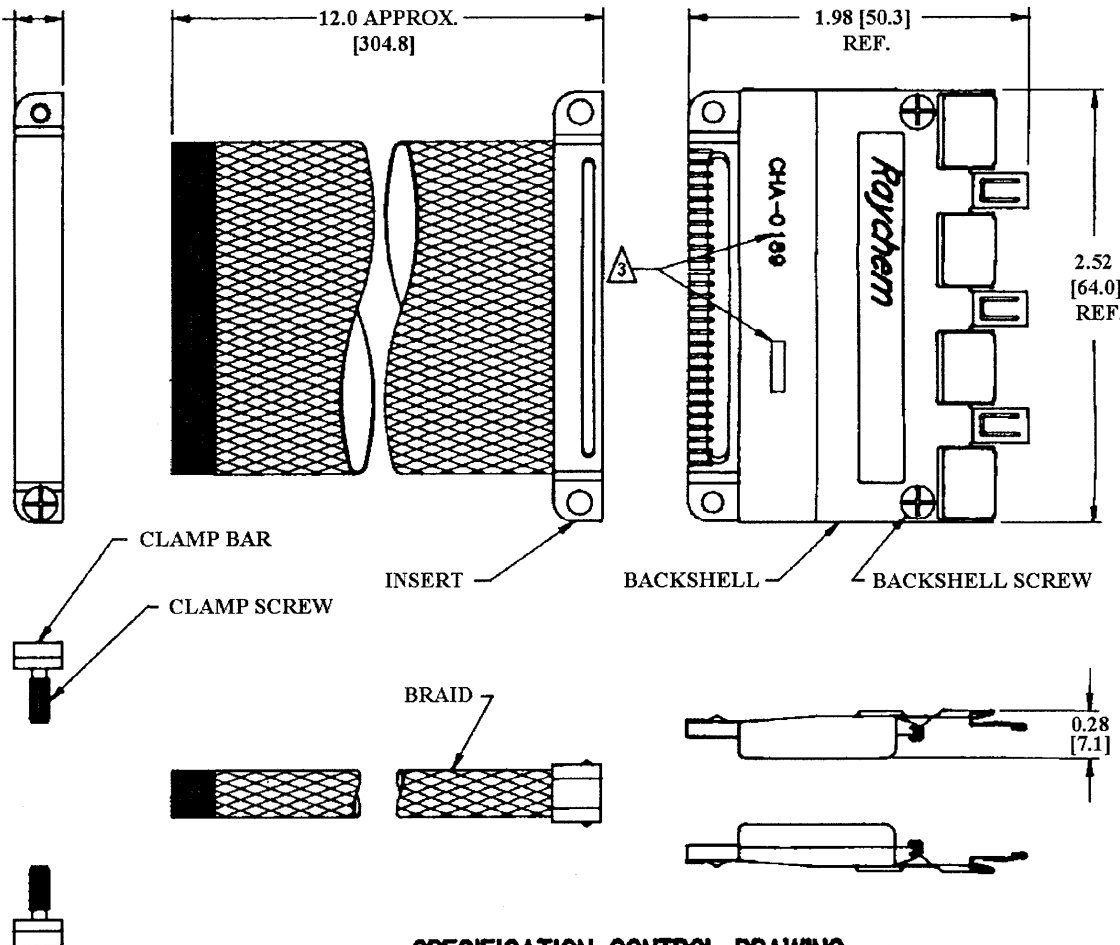

SPECIFICATION CONTROL DRAWING

© Raychem Corporation 1986

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN BRACKETS.	DRAWN	LUTTICKEN	4-23-87	Raychem RAYCHEM CORPORATION 500 OCEANVIEW DRIVE SHERBO PARK, CALIFORNIA 94026	
	CHECKED	J.B.			
	APPROVED	J. BLAIR	4-27-87	TITLE BACKSHELL, PLUG, 2", EME, CADMIUM PLATED (FOR ROUND WIRE PLANAR-ARRAYED CABLES) MTC SERIES	
	APPROVED	J. CAMERON	4-29-87		
DECIMALS .XXX ± .005 1.3 mm .XX ± .02 1.3 mm	CAD NAME			CHA-0189.PCX	
ANGLES .X ±	THIRD ANGLE PROJECTION				
WEIGHT 63.4 GRAMS MAX.	SIZE	CODE	DATE	NO.	REV
	C	06090		CHA-0189	B
	DO NOT SCALE THIS DRAWING			SHEET 1 OF 1	

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.