© 2020 TE Connectivity. All Rights Reserved.

| REVISIONS | | | | | |
|---|---|---|---|---|---|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | C7 | DIMENSION NO. 11 (8±1mm) ADDED | 14AUG2009 | MP | - |
| | C8 | PARTS 964131-3 AND 964131-4 REACTIVATED | 17JUN2010 | MP | - |
| | C9 | DIMENSION NO. 3 (2.8±0.05) UPDATED | 13NOV2020 | JPN | MP |
| | | | | | |

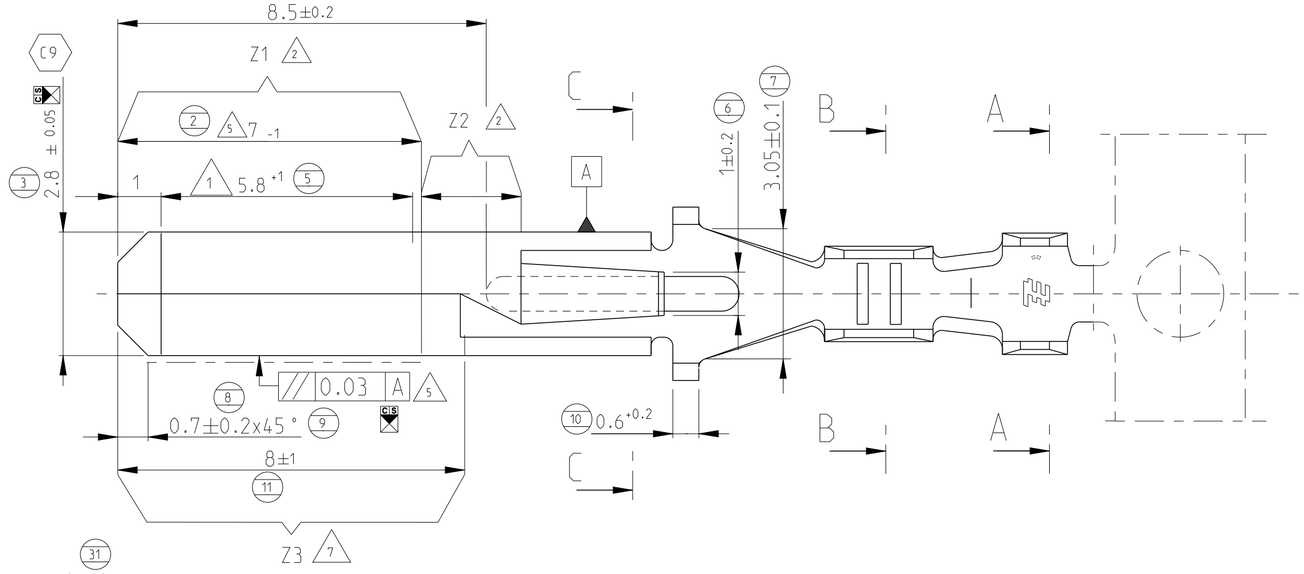


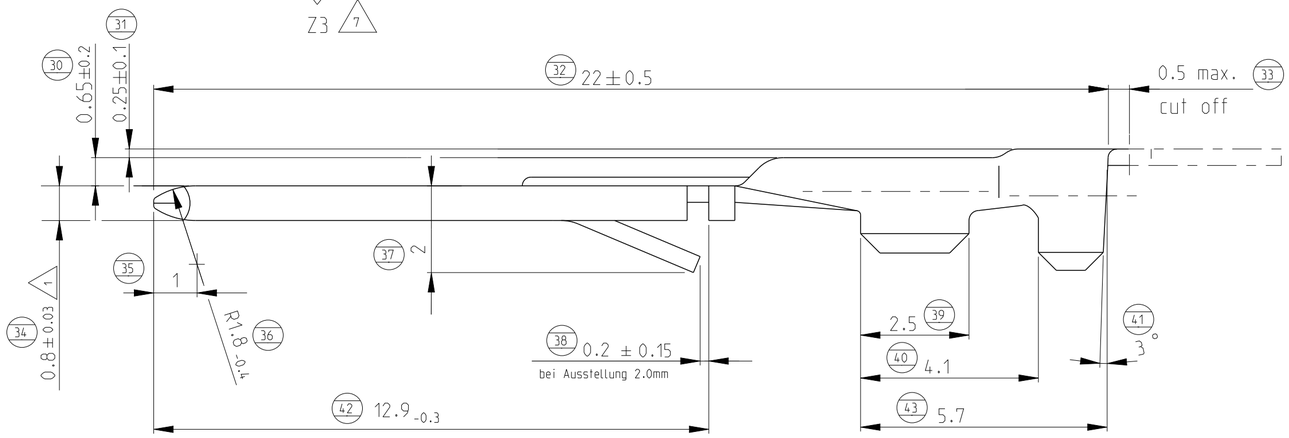


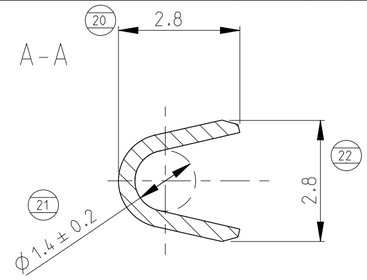


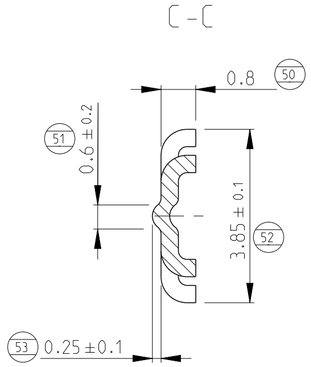





Bemerkungen
Notes

1 Dicke 0.8±0.03 auf gekennzeichneter Laenge
Tab thickness 0.8±0.03 at length

2 Ausfuehrung 'selektiv vergoldet';
Bereich Z1: Kontaktzone ≥0.8 µm galvanisch Gold ueber 1-3 µm galvanisch Nickel
Bereich Z2: Gold-Flash( ~ 0.04 µm) ueber Nickel
Crimp-Bereich: 0.8-2.3 µm galvanisch Zinn ueber Nickel

Selective gold plated version;
Area Z1: contact area ≥ 0.8 µm electro deposited gold over 1-3 µm electro deposited nickel
Area Z2: gold-flash (~ 0.04 µm) over nickel
Crimp area: 0.8-2.3 µm electro deposited tin over nickel

3 Drahtgroessenbereich: 0.2-0.5mm²
Isolations Ø: 1.15-1.6mm FLR-Leitung
Leiter: F-Crimp
Isolation: OVL-Crimp

Wire size range: 0.2-0.5mm²
Insulation Ø: 1.15-1.6mm FLR-wire
Wire: F-Crimp
Insulation: OVL-Crimp

4 Erhältliche Verarbeitungsspezifikation
Available application specification TE-Spec. 114-18014

5 Parallelitaet ist uber diesen Bereich gewährleistet.
PARALLELSIM AT THIS AREA IS GUARANTEED.

6 Weitere Flachstecker fuer Drahtgrößenbereich
CORRESPONDING TABS FOR WIRE RANGE
0.5 - 1.0 mm² : 964132
>1.0 - 2.5 mm² : 964133

7 Bereich Z3 :min. 3 µm Ni (restlicher Kontakt blank)
Area Z3: min. 3 µm Ni (remaining contact blank)

C9 PRODUCT CHARACTERISTICS ACC. QMP_EMEA_012
BESONDERE MERKMALE NACH QMP_EMEA_012

| TE Bestell-Nr. | TE-REV. Bandware | TE Einzelausfuehrung | WERKSTOFF | OBERFLAECHE / FARBE |
|---|---|---|---|---|
| 964 131-6 | A | - | CuSn4 F47 | NICKEL PLATED 7 |
| 964 131-4 | C | 964 140-4 | CuSn4 F47 | SEL. GOLD PLATED 2 |
| 964 131-3 | C | 964 140-3 | CuNiSi F46 | PRETINNED |
| 964 131-2 | C | 964 140-2 | CuSn4 F47 | PRETINNED |
| 964 131-1 | C | 964 140-1 | CuSn4 F47 | PLAIN |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±, 1 PLC ±, 2 PLC ± ±0.3, 3 PLC ±, 4 PLC ±, ANGLES ±3°
MATERIAL: -
FINISH: -

DWN K.Sellien 21DEC1992
CHK F.Thiel 21DEC1992
APVD -
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME
FASTIN-FASTON 2.8MM TAB
FASTIN-FASTON 2.8MM Flachstecker

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A2 | 00779 | C-964131 | - |

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV C9