© – TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	1	NEW DRAWING	28AUG2020	GSK	AMO

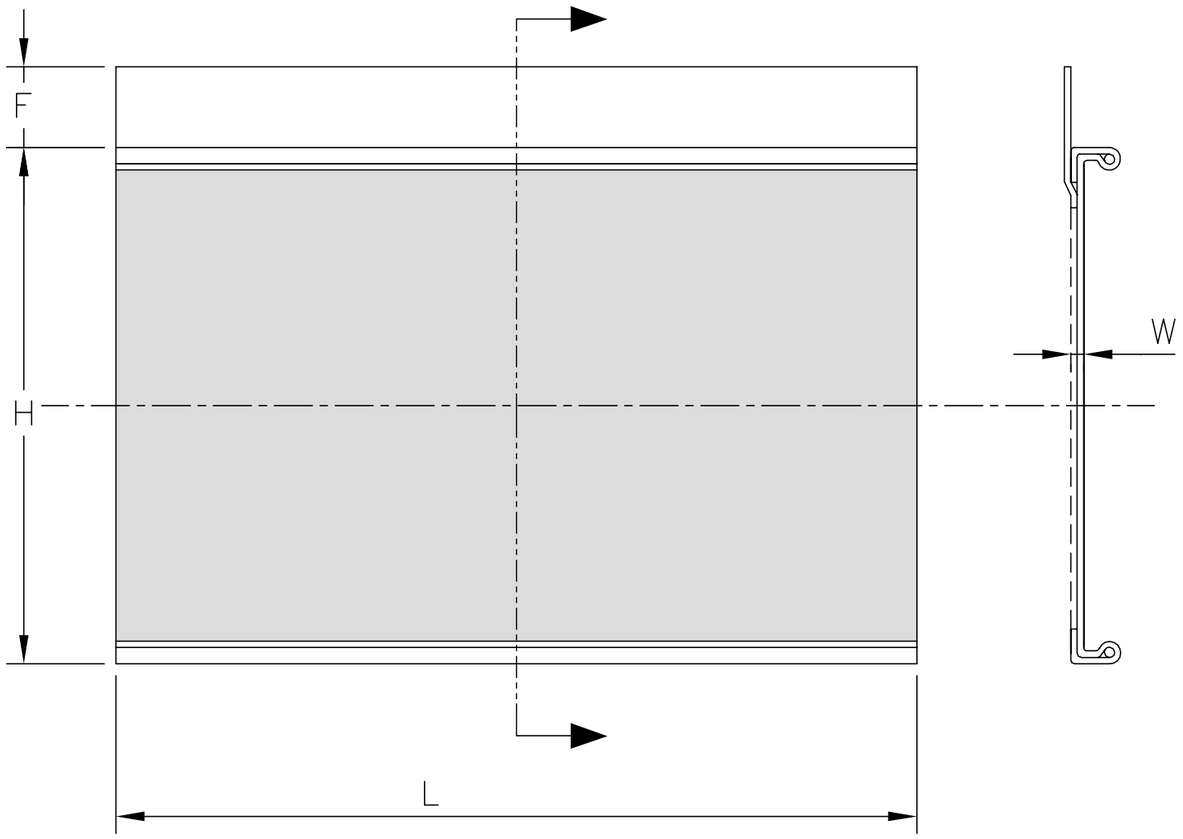

NOTES

1. DIMENSIONS IN mm. a = AS SUPPLIED,
   b = AFTER FREE RECOVERY
2. STANDARD LENGTHS L: 1000 mm, 1500 mm.
   OTHER CUT LENGTHS AVAILABLE UNDER REQUEST.
3. MAXIMUM LONGITUDINAL CHANGE AFTER FREE RECOVERY: −5%
4. STANDARD CUT LENGTH TOLERANCES:
   ± 5 mm (P ≤ 500)
   ± 10 mm (P < 1000)
   ± 15 mm (P < 1500)
   ± 1% (P > 1500)
5. STANDARD PRINTING: PRODUCT SIZE

PRODUCT SIZE	APPLICATION RANGE (MM) DIAMETER MIN.	MAX.	Ha NOM	Fa NOM	W a MIN	b MIN
45/8	8	45	180	20	1.1	3
55/12	12	55	215	20	1.1	3
84/15	15	84	305	20	1.1	3
100/25	25	100	365	20	1.1	3
125/30	30	125	435	20	1.1	3
146/34	34	146	515	20	1.1	3
164/42	42	164	560	20	1.1	3
200/50	50	200	690	20	1.1	3

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN	RAGHAVENDRA K	28AUG2020
CHK	AMO	28AUG2020
APVD	AMO	28AUG2020
PRODUCT SPEC	–	
APPLICATION SPEC	–	
WEIGHT	–	

TE Connectivity

NAME: CNSM REINFORCED WRAPAROUND SLEEVES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-EPD-202-311926-01	–

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 1 | REV 1