

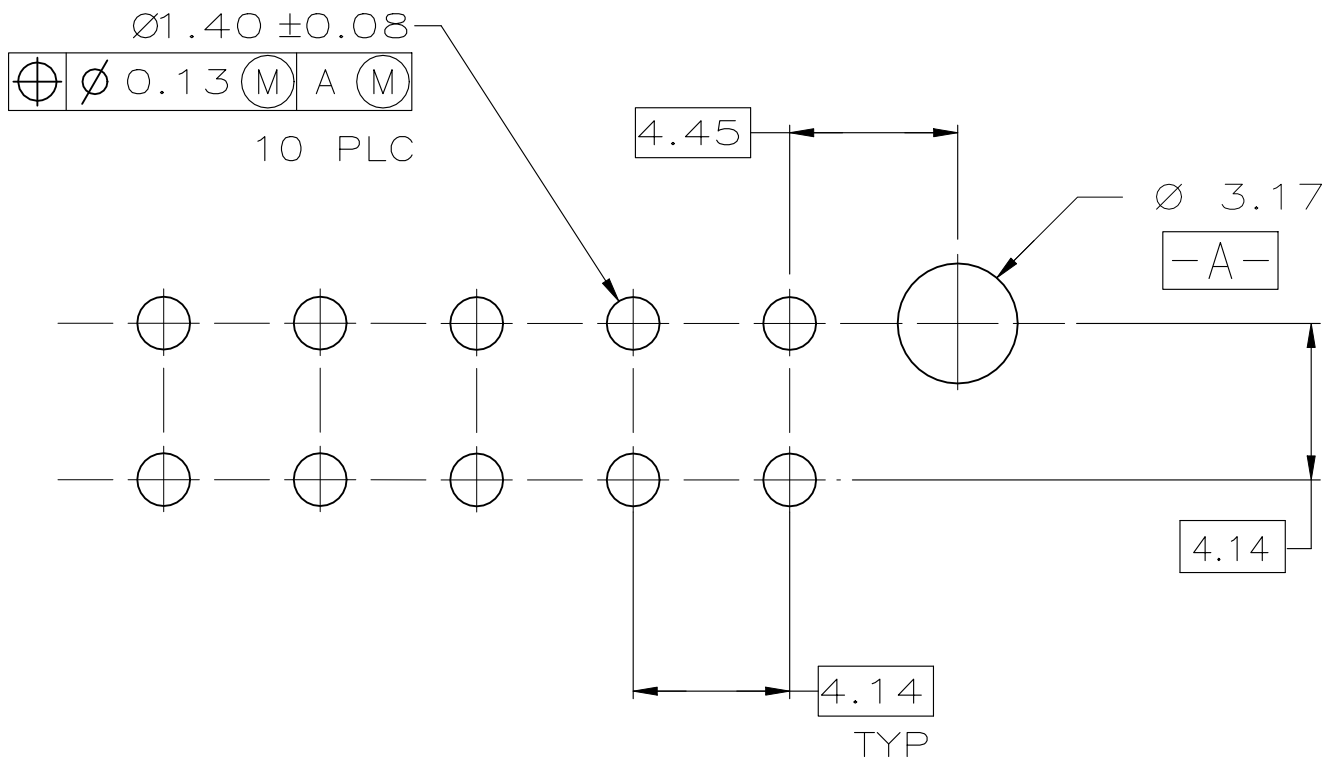
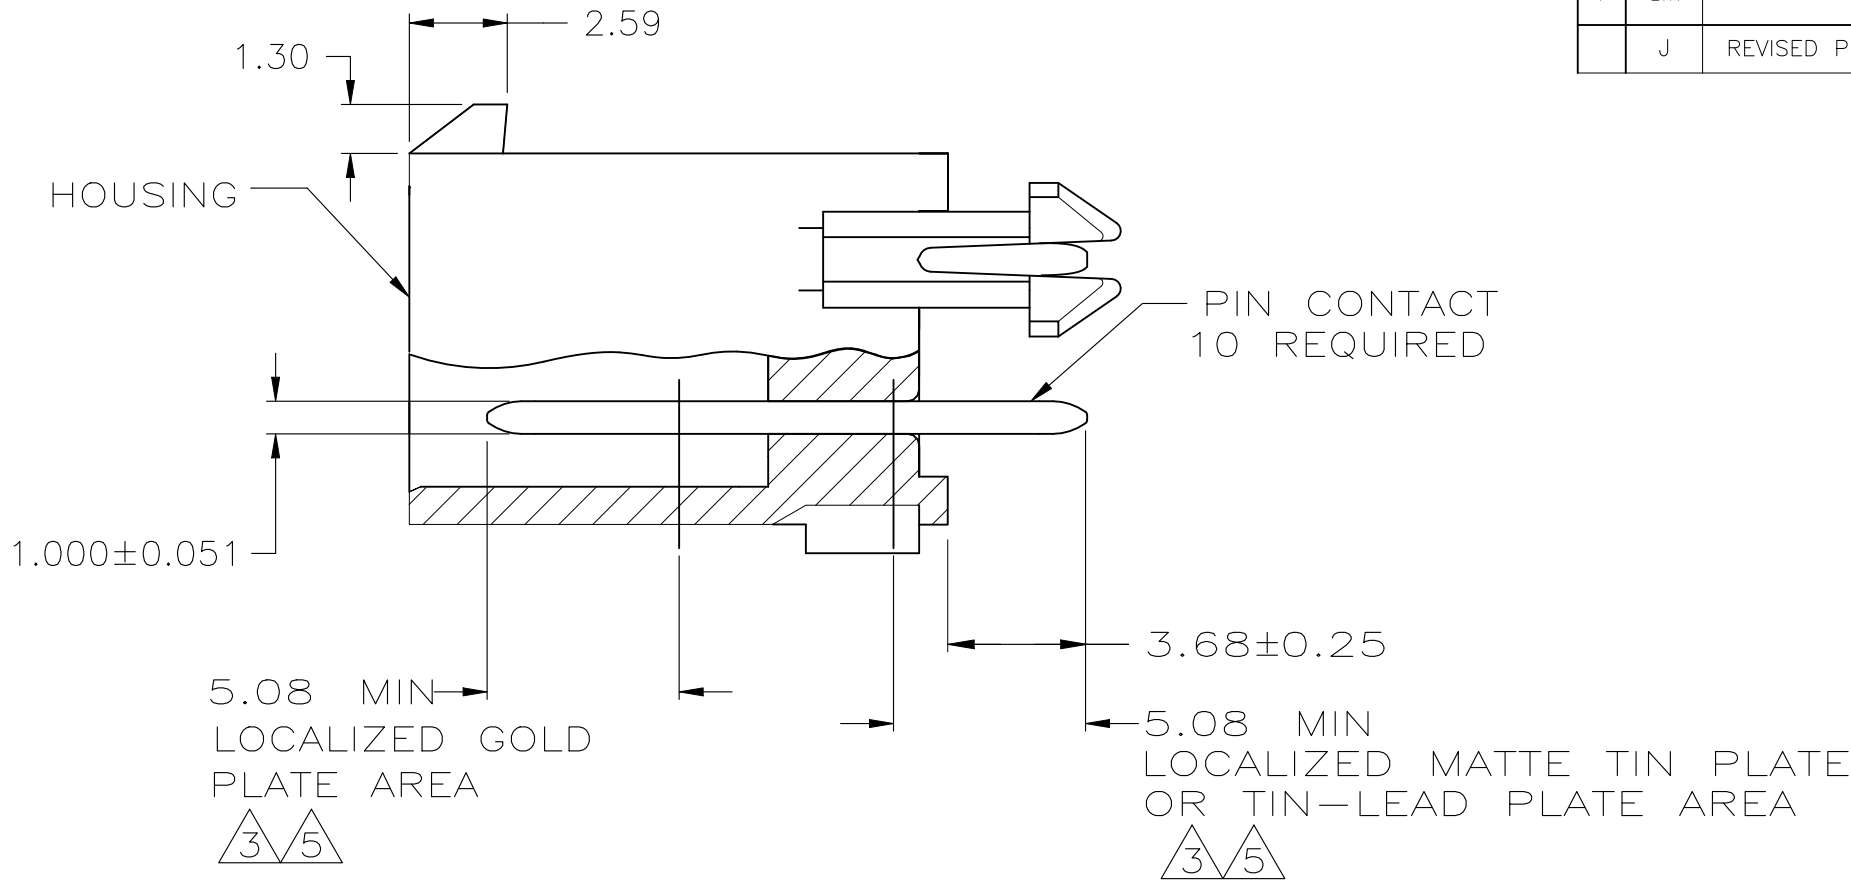


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
J		REVISED PER ECR-24-226486	20NOV2024	TB	JP

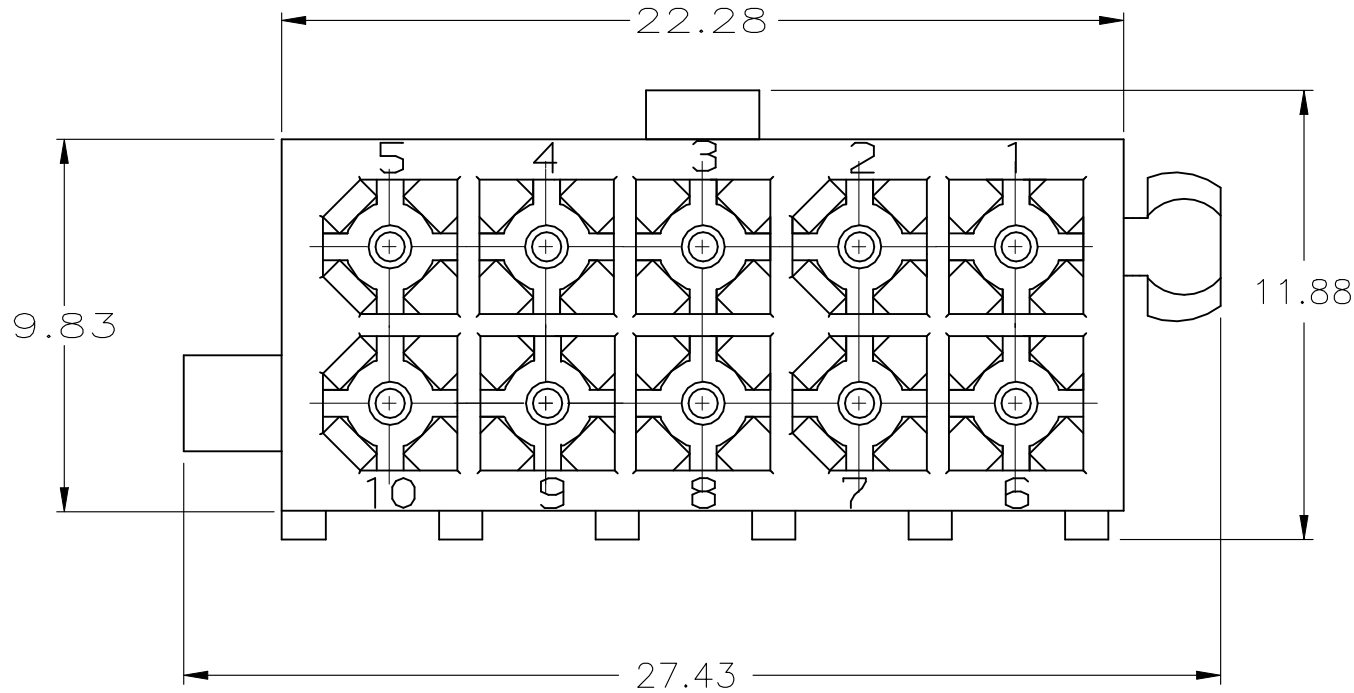

RECOMMENDED HOLE PATTERN FOR 1.57 THICK BOARD

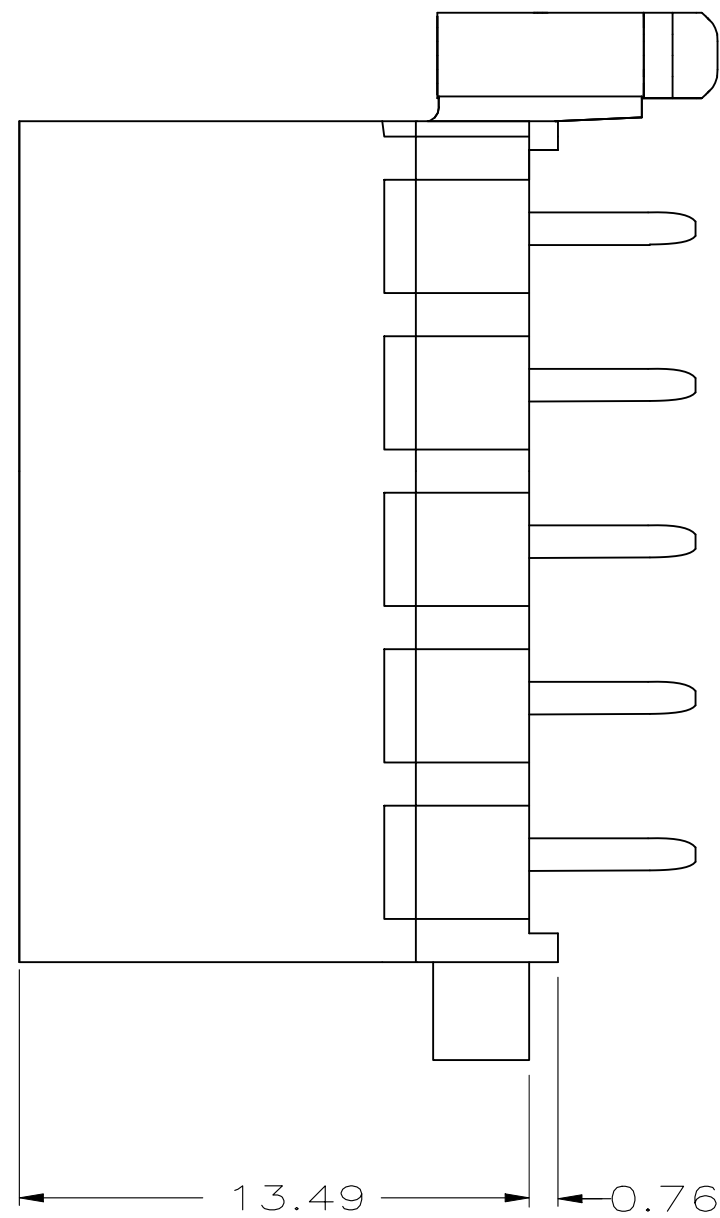

- PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 109-11-3.
- 0.00381 MIN MATTE TIN LEAD PLATE OVER 0.00127 MIN NICKEL.
- 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.
- 0.00381 MIN MATTE TIN PLATE OVER 0.00127 MIN NICKEL.
- 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

	BRASS, GOLD	5	NYLON, UL94V-0	WHITE	1-770743-1
	BRASS, TIN	4	NYLON, UL94V-0	WHITE	1-770743-0
SUPERSEDED WITH 1-770743-1	BRASS, GOLD	3	NYLON, UL94V-0	WHITE	770743-2
SUPERSEDED WITH 1-770743-0	BRASS, TIN-LEAD	2	NYLON, UL94V-0	WHITE	770743-1
	MATERIAL	FINISH	MATERIAL	COLOR	PART NO.
	PIN		HOUSING		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S CARPENTER 08JUN05	TE Connectivity		
DIMENSIONS: mm		CHK R JONES 29JUL2003			
TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD R JONES 29JUL2003	NAME		
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC	HEADER ASSEMBLY, 10 CKT, DOUBLE ROW VERTICAL MINI UNIVERSAL MATE-N-LOK		
MATERIAL		FINISH	SIZE A2	CAGE CODE 00779	DRAWING NO C-770743
			WEIGHT -	SCALE 5:1	SHEET 1 OF 1
			CUSTOMER DRAWING	REV J	