THIS DRAWING IS A CONTROLLED DOCUMENT

DRAWING NO FAD2860-3085-8-C

WRAPTER

CATALOGUE NUMBER: FAD2860-3085-8
SUITS CONDUCTOR

STRANDING/CONDUCTOR	COND. TYPE	DIAMETER	FITTING LAY
61/3.25	AAC/AAAC	29.25	RIGHT HAND

DEADEND

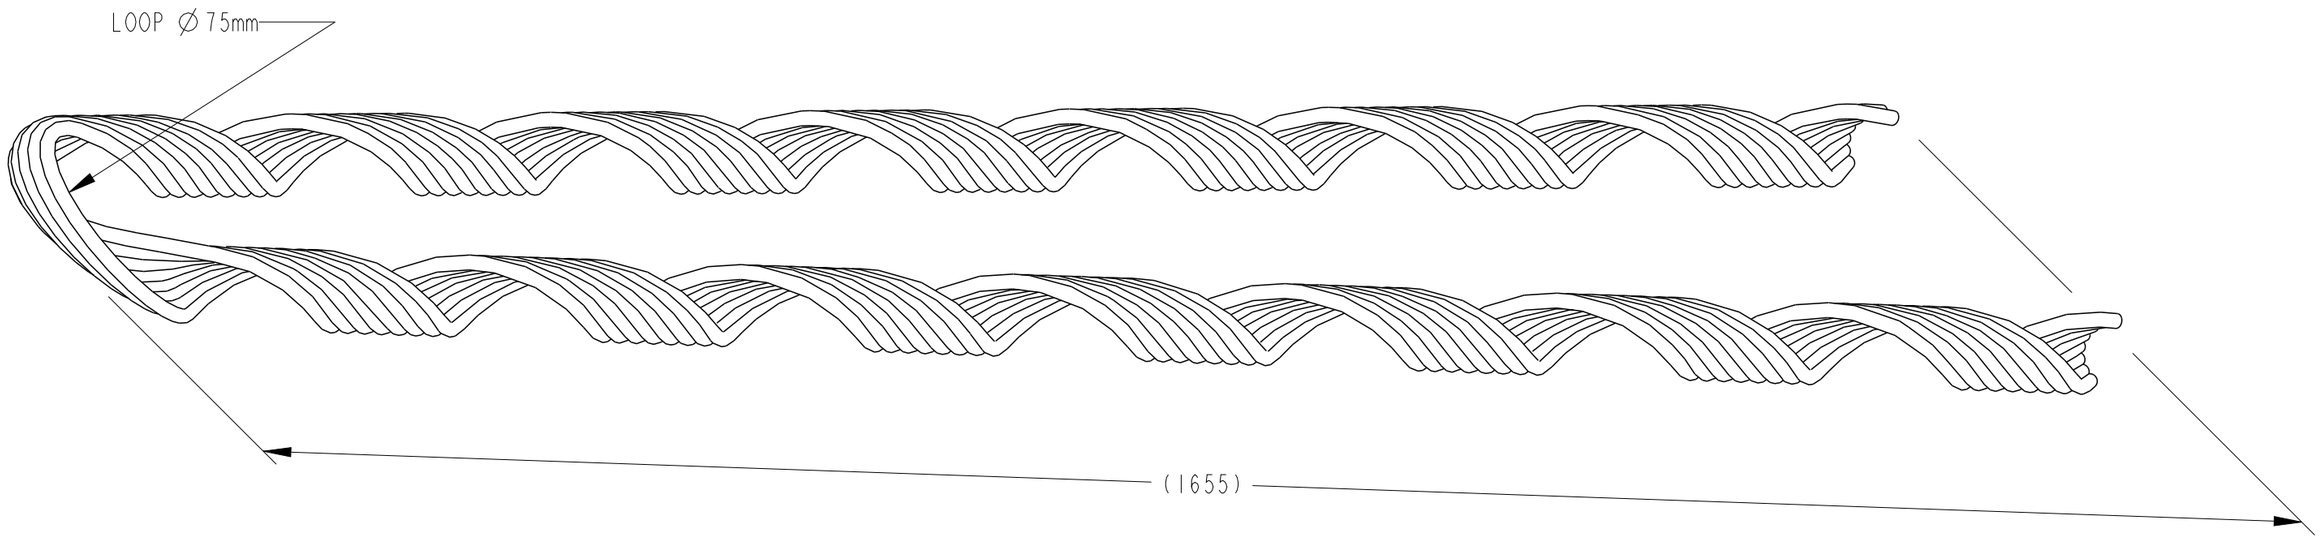

TECHNICAL SPECIFICATIONS;

CATALOGUE NUMBER: FAD2860-3085-8
DESCRIPTION: FULL-TENSION ALUMINIUM DEADEND
MATERIAL: ALUMINIUM ALLOY
NUMBER OF RODS: 8
ROD DIAMETER: 5.40mm
OVERAL LENGTH: 1655mm
END FINISH: BALLENDED
FITTING LAY DIRECTION: RIGHT HAND
COLOUR CODED: ORANGE

PRODUCT LABEL

WRAPTER TE connectivity

FAD2860-3085-8
61/3.25 AAC/AAAC

WEIGHT: 1.77kg
BATCH NO: ----------
MONTH/YEAR: ----------

BOX LABEL

WRAPTER TE connectivity

P/N: FAD2860-3085-8
ID:
DESCRIPTION:
FULL-TENSION ALUMINIUM DEADEND
61/3.25 AAC/AAAC

RANGE: 28.60 - 30.85
COLOUR-CODE: ORANGE
QTY: 10 WEIGHT: ----- BATCH: ------

POS	REV	REVISION RECORD	DATE	DWN	APVD
DIST	—	1 NEW RELEASE	20-05-2013	RN	AT
LOC					

IMPLIED NOTES
BURRS AND SHARP EDGES REMOVED
SCREW THREADS ARE TO AS 1275
DO NOT WORK TO DIMS MARKED REF
SURFACE FINISH 6.3 U.N.O.
DIMS ARE IN mm. DO NOT SCALE

IMPLIED TOLERANCES
HOLE DIA AND LOCATIONS..±0.5mm.
DIMENSIONS UP TO 30mm..±1.5mm.
DIMENSIONS OVER 30mm...±5%.
UP TO A MAX OF.....±5mm.
ANGULAR DIMENSIONS.....±5°.

TCPN -
PART Alias UTX/DUL FAD2860-3085-8
Cat No FAD2860-3085-8

MATERIAL DESC ALUMINIUM ALLOY
MATERIAL NO -
MATL SPEC/STD/DRG NO -
PROCESS SPEC HEAT TREAT/PLATING NO

TITLE
FULL-TENSION ALUMINIUM DEADEND (FAD) FITTING
COND.RANGE: ∅28.60-∅30.85 61/3.25 AAC/AAAC

DRAWN RN | DATE 20-05-2013
CHECKED MN | APPROVED AT

TE Connectivity
2/3 Corella Close
Berkeley Vale NSW 2261 Australia

SIZE A3 | PROJECTION 3RD ANGLE | SCALE NTS
DRAWING NO FAD2860-3085-8-C
SHEET 1 OF 1 | REV 1

Format: generic_ma3_au_rl.frm
Template: tec_generic_a3_metric_au_rl.drw
Dwg No from Pt Mod Fam Tbl: >AUXXXXX

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TE CONNECTIVITY CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN TE CONNECTIVITY PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TE CONNECTIVITY CORPORATION, AUSTRALIA.