


CTJ420E014


REVISIONS

SYM	DESCRIPTION	DATE	APPROVED
N/C	NEW RELEASE PER E.O. 84122	7-8-77	D A G
A	REVISED PER E.O. 83217	10/21/77	JDM
B	REVISED PER E.O. 89017	3-20-80	L. Stoltz

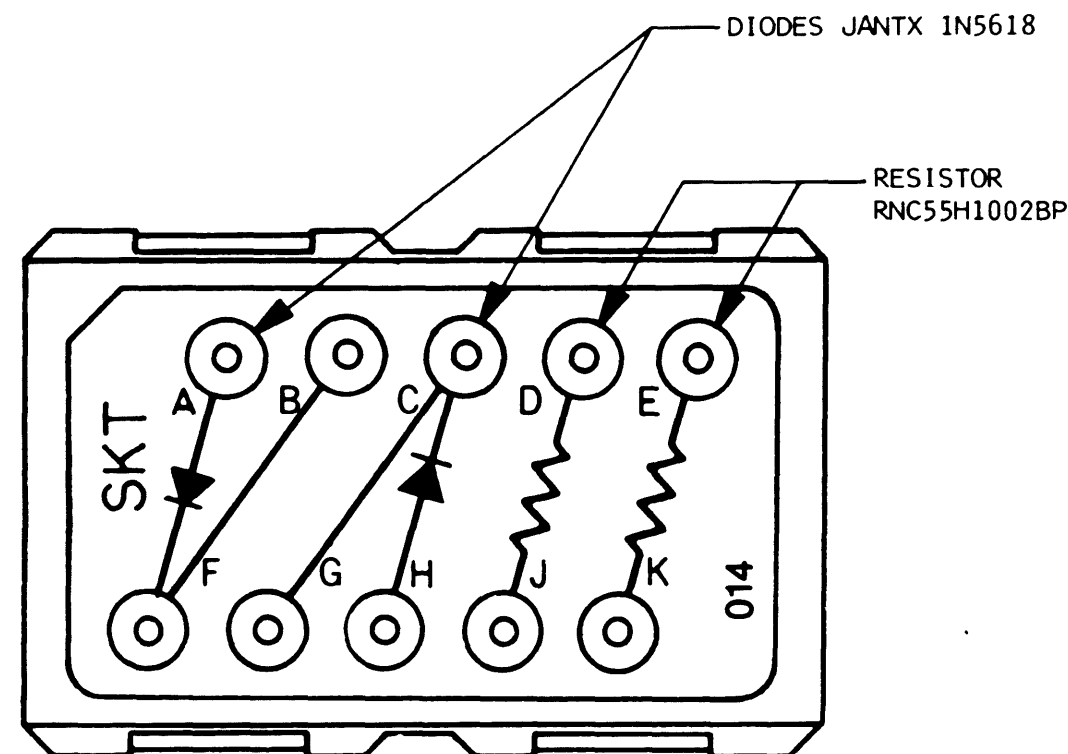

10. TEMPERATURE RANGE: -67°F TO 257°F (-55°C TO 125°C)
9. DIODES: TWO JANTX IN5618
PRV 660V @ I_{RM} -50μA
V_{FM} 1.2V I_{FM} 1.0A t_{rr} 2.0μ SEC
8. RESISTORS: TWO RNC55H1002BP
WATTS 1/10W VOLTAGE 250V MAX
RESISTANCE VALUE 10KΩ ±.1%
7. MATERIALS & FINISHES:
HOUSINGS - THERMO PLASTIC
GROMMET - SILICONE ELASTOMER
PIN CONTACTS - COPPER ALLOY PLATED GOLD
6. REQUIRES CONTACT TOOL NO. M15570-20.
5. SEE ENVELOPE DRAWING NO. CTJ-3 FOR SUITABLE RAIL ASSY'S.
4. FOR CONTACT DATA SEE ENVELOPE DRAWING 1625-1-0000.
3. CTJ420E-014
CIRCUIT ARRANGEMENT.
2. THE CIRCUIT IDENTIFICATION WILL BE SCREENED ON MODULE.
1. DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED.

NOTE:

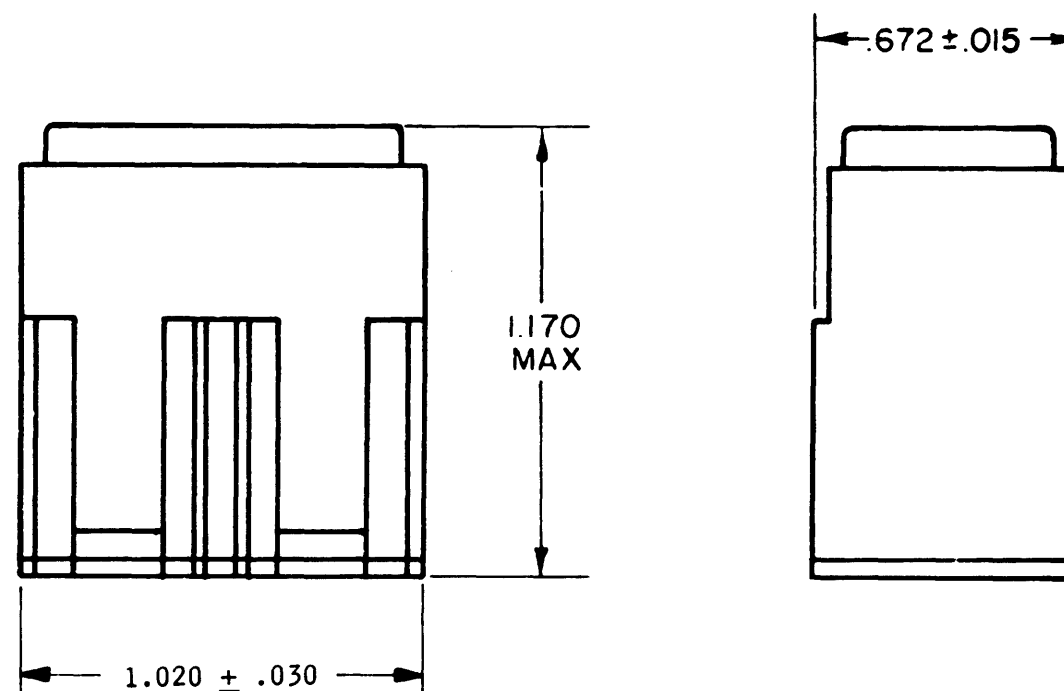

SIGNATURE & DATE		MODULE ASSEMBLY, ELECTRONIC COMPONENT SIZE 12 SIZE 20 CONTACTS 014 ARRANGEMENT ENVELOPE	CP	MATL CODE
DR	<i>J. Brandes 7-18-77</i>		The Deutsch Company ELECTRONIC COMPONENTS DIVISION Menthol Airport Banning, California	
CHK	<i>D. J. Davis 7-19-77</i>			
PE				
APPD				
SCALE NONE WT			B	CTJ420E014
		DWG SIZE	CODE 11139	SHEET 1 OF 1