


LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	INITIAL REVISION	29OCT2015	HD	CD

Part as supplied

Part fully recovered

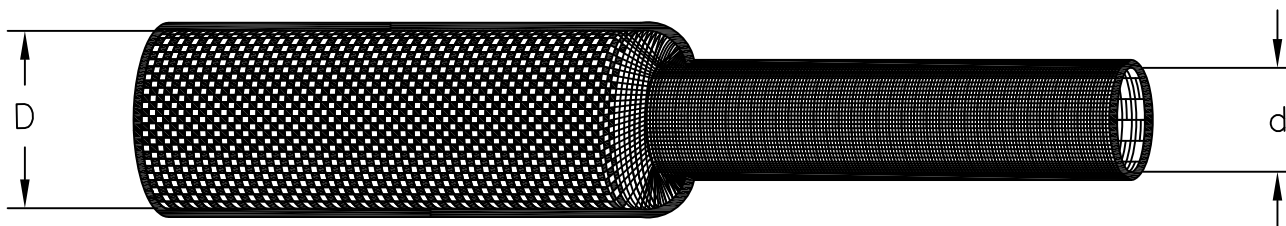

PRODUCT DIMENSIONS & NOTES

DIMENSIONS mm (inches)

D DIA.	d DIA.
MIN	MAX
40.0 (1.57)	20.0 (0.79)

NOTES:

Conforms to TE specification 108-32097.

Longitudinal shrinkage on full recovery = -10 to -20%

Fully recovered fabric wall thickness approximately 1mm (0.039)

MATERIAL:

WARP MATERIAL: Polyester. Colour: Orange

WEFT MATERIAL: Irradiated Modified Polyolefin. 0.30mm nominal (0.01)
Colour: Black



COATING: Modified Polyolefin.

THIS DRAWING IS UNPUBLISHED. OCT , 2015.

THIS DRAWING IS UNPUBLISHED.

ALL RIGHTS RESERVED.

© COPYRIGHT 2015 Tyco Electronics UK Ltd, Swindon, UK

DIMENSIONS:		DWN	HD	29OCT2015	MATERIAL		FINISH			
mm		CHK	HD	29OCT2015	<div>TE Connectivity</div>					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	CD	29OCT2015						
		PRODUCT SPEC		NAME						
0 PLC ± —		108-32097			HFT5000					
1 PLC ± —		APPLICATION SPEC			HEAT SHRINKABLE FABRIC TUBING					
2 PLC ± —										
3 PLC ± —		—		SIZE	CAGE CODE	DRAWING NO		RESTRICTED TO		
4 PLC ± —				A4	—	© HFT5000-40/20-3		—		
ANGLES ± —										
		WEIGHT			39.7 g/m					
		CUSTOMER DRAWING								
					SCALE	NTS	SHEET	1 of 1	REV	A

