

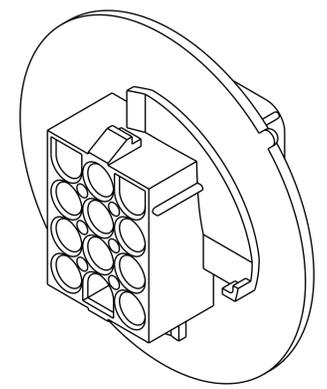


REVISIONS				
P.	LTN.	DESCRIPTION	DATE	APVD.
H		REVISED PER ECR-17-015775	03NOV2017	BDA KR




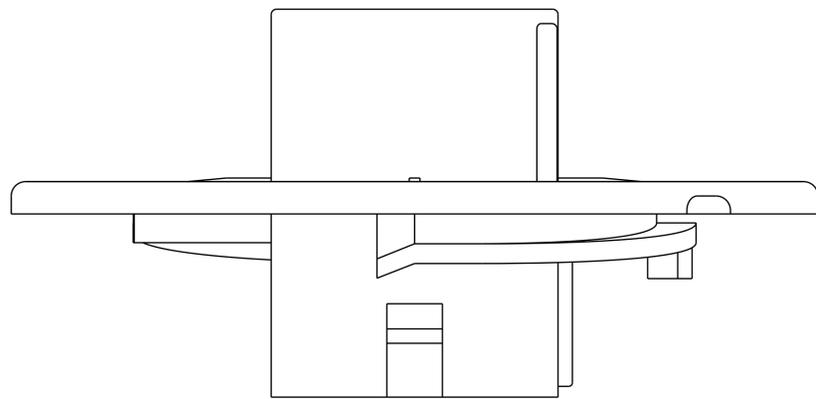


3-DIMENSIONAL MODEL
SCALE 2:1

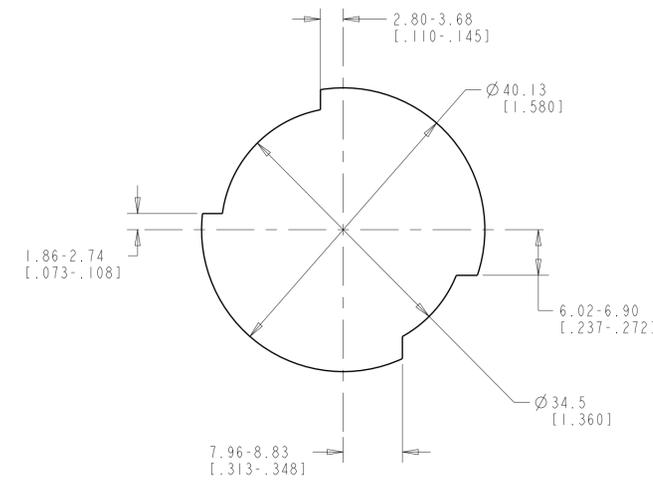

RECOMMENDED CUT OUT
SCALE 2:1

- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
 - RECOMMENDED PANEL THICKNESS 0.76 - 2.29 [.030 - .090].
 - PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
 - DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED CONDITION ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- 5 UL AND CSA LOGOS LOCATED APPROXIMATELY AS SHOWN

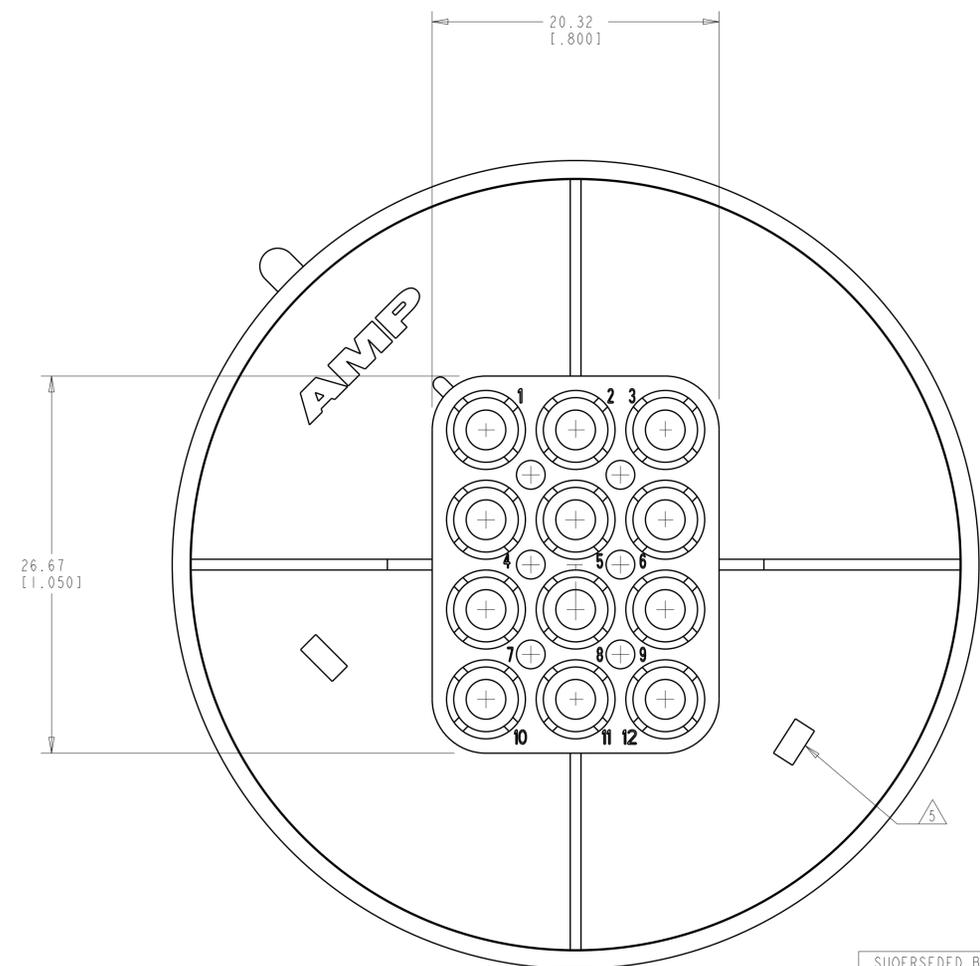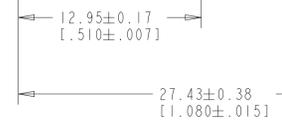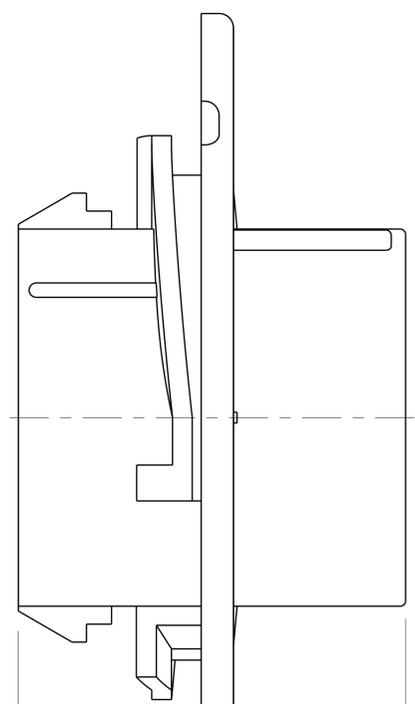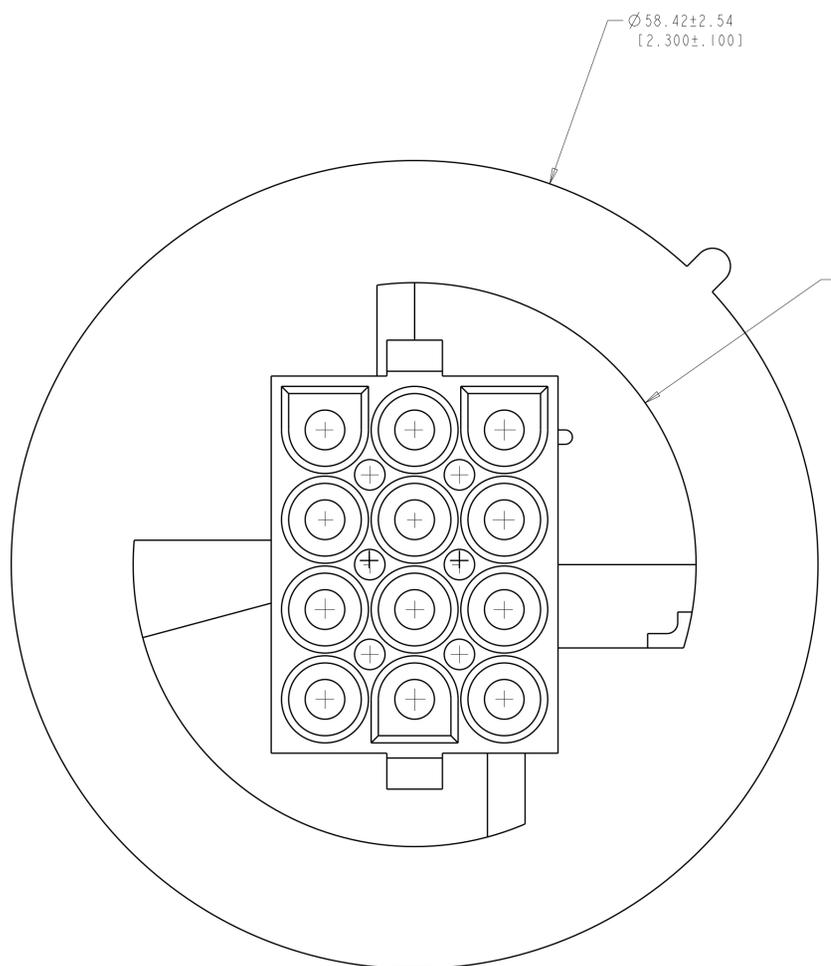

BLACK	1-794762-9
GRAY	1-794762-8
BLUE	1-794762-6
GREEN	1-794762-5
YELLOW	1-794762-4
ORANGE	1-794762-3
RED	1-794762-2
BROWN	1-794762-1
RED	794762-3
NATURAL	794762-1
COLOR	PART NUMBER

SUOERSEDED BY 794762-3

THIS DRAWING IS A CONTROLLED DOCUMENT. DWN: K. WHITAKER 20-JUNE-2000
 CHK: K. COBLE 20-JUNE-2000
 APVD: K. COBLE 20-JUNE-2000

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	NAME
0 PLC ±	0 PLC ±0.511(.020)	APPLICATION SPEC	CAP.
1 PLC ±	1 PLC ±		12 CIRCUIT,
2 PLC ±	2 PLC ±		UNIVERSAL MATE-N-LOK(TM), SPECIAL
3 PLC ±	3 PLC ±		
4 PLC ±	4 PLC ±		
ANGLES	40° 30'	WEIGHT	SIZE
MATERIAL	FINISH	CUSTOMER DRAWING	A1 00779 C=794762
NYLON, UL 94V-0, WHITE			SCALE 4:1 SHEET 1 OF 1 REV H

STE TE Connectivity