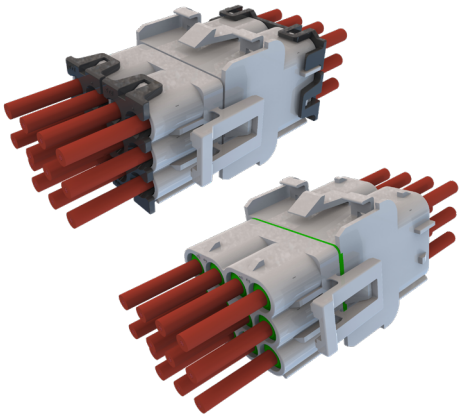


ESSENTIAL UNIVERSAL MATE-N-LOK CONNECTOR WITH WIRE SEAL

ERGONOMIC HIGH-CURRENT WIRE-TO-WIRE SOLUTION WITH ROBUST IP67 SEALING PROTECTION

TE Connectivity(TE)'s latest Essential Universal MATE-N-LOK connector with wire seal, an evolution of the traditional Universal MATE-N-LOK platform, is designed to help deliver reliable sealed performance while maintaining assembly efficiency and design compatibility. The integrated sealing system, consisting of a single-wire seal, interface seal and sealed plug, provides IP67 protection against moisture and dust, supporting up to 16A (sealed version) in demanding environments.

The single-wire seal design helps deliver reliable sealing performance while enhancing assembly efficiency. It supports a precise fit for individual terminals and provides for automated insertion onto wires. Additionally, the design is compatible with high running housings, which helps streamline part variations and reduce SKU complexity. The sealed plug with an enhanced interface seal helps enable smooth mating and improve locking reliability. An external latch with optional terminal position assurance (TPA) helps ensure secure mating and reliable retention, even in vibration prone applications.

Compatible with existing Universal MATE-N-LOK assemblies, this solution supports a highly efficient upgrade with minimal redesign efforts, suitable for customers seeking robust environmental protection, assembly efficiency, and platform continuity.

KEY FEATURES

- The sealing system with a single-wire seal, interface seal and sealed plug provides IP67 protection against moisture and dust, while supporting up to 16A current
- Single-wire seal provides an accurate fit for each terminal and supports automated insertion onto wires, while also being compatible with high running housings to simplify part variations and help reduce SKU complexity
- The sealed plug with latest interface seal and low mating force terminal design helps smooth mating and easy terminal insertion from multiple angles
- An external latch, along with an optional terminal position assurance (TPA), helps prevent incomplete insertion and guard against accidental back-out or un-mating
- Compatible with the existing Universal MATE-N-LOK family, providing for easy upgrades with minimal redesign effort

APPLICATION



HVAC equipment | Elevator and lift system | Industrial machinery | Liquid cooling | Battery Energy Storage System(BESS)

ELECTRICAL

- Voltage rating: 600 VAC or VDC
- Maximum current*: 17 A (standard) or 16 A (sealed)

MECHANICAL

- Wire Range: 20AWG-14AWG
- Pitch: 6.35 mm
- Position: 2P/3P/4P/6P/9P/12P

MATERIALS

- Contact: Brass / Phosphor Bronze
- Operating Temperature (°C): -55 to +105

STANDARDS AND SPECIFICATIONS

- Product Specification: 108-160572
- Application Specification: 114-160319
- UL 94 V-2
- UL Recognized: File E28476

LEARN MORE

- Product page(link needed)

** the data is based on 2P connector with 14 AWG brass terminal*

PART NUMBER - STANDARD VERSION

Housing

Positions	Cap Part Number	Cap TPA	Plug Part Number	Plug TPA
2P	2406821-1	2406825-1	2406822-1	2406825-1
3P	2406819-1	2406824-1	2406820-1	2406824-1
4P	2406817-1	2406823-1	2406818-1	2406823-1
6P	2406815-1	2410990-1	2406816-1	2410990-1
9P	2406813-1	2410990-1	2406814-1	2410990-1
		2406824-1		2406824-1
12P	2406811-1	2411254-1	2406812-1	2410990-1 x 2
		2406823-1		

Terminal

Type	Wire Range (AWG)	Material	Part Number
Pin	14–16	Brass	2406831-1
		Phosphor Bronze	2406831-2
	18–20	Brass	2406832-1
		Phosphor Bronze	2406832-2
Socket	14–16	Brass	2406833-1
		Phosphor Bronze	2406833-2
	18–20	Brass	2406834-1
		Phosphor Bronze	2406834-2

Terminal Position Assurance (TPA)

Positions	Part Number
2P	2406825-1
3P	2406824-1
4P	2406823-1
6P	2410990-1
8P	2411254-1

PART NUMBER - SEALED VERSION

Housing

Position	Cap Part Number	Plug Part Number	Interface Seal Part Number
2	2406821-1	2501791-1	2410996-1
3	2406819-1	2501792-1	2410995-1
4	2406817-1	2501793-1	2410994-1
6	2406815-1	2501788-1	2410993-1
9	2406813-1	2501789-1	2410992-1
12	2406811-1	2501790-1	2410991-1

Terminal

Type	Wire Range (AWG)	Material	Part Number	Wire Seal Part Number	Wire OD Range(mm)
Pin	14–16	Brass	2406835-1	2410997-1	2.3–2.9
		Phosphor Bronze	2406835-2		
	18–20	Brass	2406836-1	2410998-1	1.5–2.3
		Phosphor Bronze	2406836-2		
Socket	14–16	Brass	2406837-1	2410997-1	2.3–2.9
		Phosphor Bronze	2406837-2		
	18–20	Brass	2406838-1	2410998-1	1.5–2.3
		Phosphor Bronze	2406838-2		

Connect With Us

We make it easy to connect with our experts and are ready to provide the support you need.
Visit **te.com/support** to chat with a Product Information Specialist.

TE Connectivity
Connected Living Solutions

te.com/Essential-Universal-MATE-N-LOK

TE, TE Connectivity, TE connectivity (logo), MATE-N-LOK, and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

© 2026 TE Connectivity. All Rights Reserved.

08-26